GLASS THICKNESS DEPENDANT UPON PARTITION HEIGHT & LAYOUT REQUIRED

MANIFESTATION TO GLASS FROM THE FINISHED FLOOR LEVEL MUST BE INSTALLED IN ACCORDANCE WITH DOCUMENT 'M' BUILDING REGULATIONS

ALL DIMENSIONS ARE NOMINAL & IN mm

Z'BS AE

L GLASS MUST CONFORM 1 6262 & DOCUMENT BUILDING REGULATIONS

70

* 10mm Including SCFMP

base & clearance


DIM R

DIM Q

38

Ø П

DIM Q =DIM R = SUBJECT TO DATA SHEET DORW/CAL 10 DIM -10 OR 12mm THICK TOUGHENED GLASS (SEE NOTES) FL00R TO CEILING HEIGHT SCFMP FFL

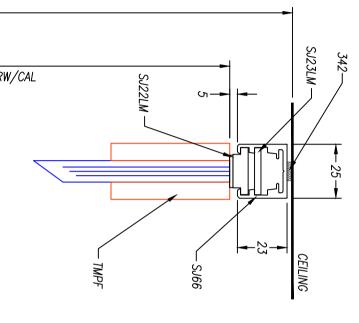

PROPERTY OF

KOMFORT WORKSPACE
ASHURST,BROADLANDS BUSINESS CAMPUS
LANCHURST WOOD ROAD,
HORSHAM
WEST SUSSEX, RH12 4QP
TEL: 01403 390300

DO NO

WEB www.komfort.com DO NOT SCALE IF IN DOUBT ASK FINISH :

		DATE	22.02.12	T
ISSUE	DESCRIPTION OF CHANGE	DRAWN	SSG	
MATERIAL :		CHKD	BJP	C
FINISH:		SCALE	NTS	

TITLE ORBIS F/H FRAMELESS GLASS DOOR USING TOP PIVOT & FLOOR MOUNTED

CLOSER VERTICAL SECTION DRAWING No

ISSUE 26009 4

©COPYRIGHT & DESIGN

2012