


MANIFESTATION TO GLASS FROM THE FINISHED FLOOR LEVEL MUST BE INSTALLED IN ACCORDANCE WITH PART 'M' BUILDING REGULATIONS

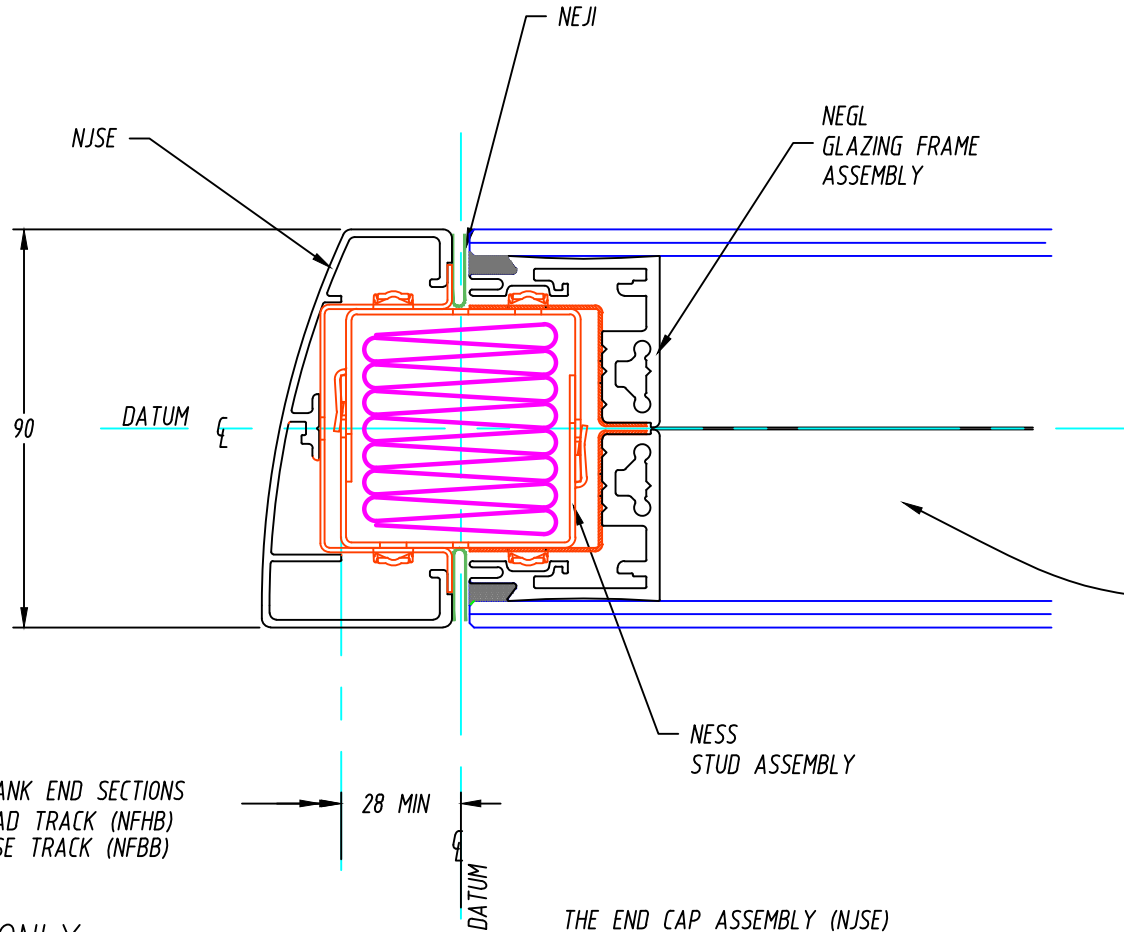

POSITION OF BLANK END SECTIONS HEAD TRACK (NFHB) & BASE TRACK (NFBB)

THE END CAP ASSEMBLY (NJSE) IS PRE CUT TO LENGTH TO MATCH THE PANEL HEIGHT

NON FIRE PERFORMANCE ONLY

SEE SUMMARY OF PERFORMANCE & SEPERATE INSTRUCTION DATA SHEETS FOR ADDITIONAL COMPONENTS, INTUMESCENTS & SEALS TO OBTAIN ACOUSTIC & FIRE PERFORMANCE

ALL DIMENSIONS ARE NOMINAL & IN mm



© COPYRIGHT & DESIGN 2011 PROPERTY OF KOMFORT WORKSPACE
 ASHURST, BROADLANDS BUSINESS CAMPUS,
 LANGHURST WOOD ROAD, HORSHAM, WEST SUSSEX, RH12 4QP
 TEL : 01403 392300 WEB www.komfort.com

DO NOT SCALE IF IN DOUBT ASK

4	GEN REVISION	DATE	17:06:11	TITLE	LS90	ISSUE	4
ISSUE	DESCRIPTION OF CHANGE	DRAWN	DDS	FAIR END TO DOUBLE GLAZED USING 6mm TOUGHENED SAFETY GLASS			
MATERIAL :		CHKD	BJP	DRAWING No	21057		
FINISH :		SCALE	NTS				